IZH43KH (BOUNTY HUNTER II)



SIDE BY SIDE COCKING HAMMER SHOTGUN

WARNING AND INSTRUCTION MANUAL

Europeen American Amory Corp. 3865 North U.S. Highway One Cocos, Florida 32926 (321) 639-4842 www.eascorp.com E-mail: eascorp@bv.net

EAA MODEL: IZH43KH SIDE BY SIDE COCKING HAMMER SHOTGUN

WARNING AND INSTRUCTION MANUAL PLEASE READ THESE INSTRUCTIONS

MODEL NUMBER

BARREL LENGTH

GAUGES

(ZH43KH (BOUNTY HUNTER II) 191, 241, 261, 281

12, 20, 410, 28

TYPE SIDE BY SIDE

FINISH BLUE / NICKEL

SHOTGUN

CASE COLOR

GENERAL INFORMATION:

Weight (average) - 28" = 9.5 Lbs. Overall Langth 36, 40', 42', 44'

FOR YOUR SAFETY AND THE SAFETY OF OTHERS, this owner a manual conteins important warnings and safety procedures which must be understood BEFORE using this firearm. Read the entire manual and if you do not understand any part of it or the operation of your chotgun, stop and seek professloval firearms instructions. You can get a copy of this manual from European American Armony Corp. on request

Record the serial number of your firearm	
ř	
and a description of it	

Make a copy of this manual, proof of purchase/sales record for safekeeping in a secure sale or fireproof container. Such proof is necessary if the firearm is stolen or for warranty repair. Before handling any firearm, make sure you know the salety procedures and most importantly, keep the frearm pointed in a sale direction.

WARNING

YOU RISK INJURY OR DEATH BY HANDLING THIS FIREARM Before handling this firearth, read, understand and follow the instructions in this manuel. Arways keep this manual with the frearm. If you lend, give or sell this lirearm, he sure the manual gobs with it. If there is anything you do not Understand, seek advice from someone qualified in sale handling of freams.

WARNING

This (rearm should always be transported unloaded in its case.

Type Of Ammunition To Be Used:

It is suggested that high quality commercially manufactured arrametrion be used in this firearm. Some factory ammunition works before than others and you should stick with the brand you find works well in your shotton. Avoid military surplus or hot loaded ammo. The use of reloaded, high pressure or resold loaded ammunition will you the warranty.

NOTICE

SHOTGUNS ARE CLASSIFIED AS FIREARMS OR DANGEROUS WEAPONS and are sold by European American Armory Corporation with the specific understanding that we are not responsible in any manner what so ever for their safe handling or resale under total laws and regulations.

European American Armory shall not be responsible in any manner whatsoever for malfunctioning of the firearm, for physical injury or for property damage resulting in whole or in part from (1) intentional or negligent discharge, (2) improper or careless handling, (3) unauthorized modifications and/or alteration to the internal/salety mechanisms. (4) delective, improper, high pressure, handloaded, or reloaded ammunition. (5) corrosion and/or lack of proper maintenance (6) neglect, or (7) other influences beyond our direct and immediate control. This limitation applies regardless of whether liability is asserted on the basis of contract, negligence or strict tiability (including any faiture to warn). Under no circumstance shall European American Armory Corporation be iable for inclidental or consequential damages, such as less of use of property, commercial loss and loss of earnings or prolits.

Safety Procedures:

- We recommend that you get competent firearms instruction in sele handling before using this firearm. Please ask your dealer. All guns are entremely dangerous if carelessly handled or used. Remember that the <u>linearm user</u> is the onmary "safety" and to depend on any mechanical devices is to be only half safe.
- This firearm will fire it a cartridge is in the chember and the trigger is pulled and the setety is disengeged.
- DO NOT LOAD THIS SHOTGUN UNTIL YOU UNDERSTAND HOW THIS SHOTGUN OPERATES, KEEP this shotgun unloaded at all times except when ready to fire and you are sure of your target.
- 4. ALWAYS carry this shotgun in a case or original box unfoacled.
- 5. NEVER point this shotgun at anything that is not your intended target even if this shotgun is unleaded. When leading, descring, unleading or handling, always be sure the muzzle is pointed in a sale direction and always keep your finger off the trigger.
- NEVER assume any gun is unloaded. Setore handing, check to make sure the chamber is empty. See unloading instructions and then unload any am-

murition. Make sure you know that this or any firearm is fully unleaded before displaying or handling it. When handling any freezm, keep your fingers away from the trigger at all times until you intend to fire.

7. WARNING: The actual freatm does not contain any lead; however, it does fire ammunition containing lead or lead compounds known to the State of California to cause cancer, birth defects, reproductive toxicity, and other serious physical Injury. Those who discharge a firearm, stand near someone who discharges a firearm or cleans firearms are hereby warned of the dangers presented by lead and lead compounds and should take protective hearth measures. Avoid exposure to lead while handling and wash your hands after contact. Proper air ventilation is absolutely necessary when shooting indoors.

AMMUNITION WARNING

Old, Hot-loaded and/or re-loaded ammunition may be dangerous. Because of the poor or nonewaterit quality control standards among some companies or people who make reloaded ammunition and the dangers of overloads and under loads (squib loads) which may occur, we recommend that only good quality new factory ammunition be fired in our livearms. (If you prepare your own hand loads, do NOT exceed recommended pressures in line with those generated by standard factory loads as manufactured by Remington, Winchester, Federal, PMC or other reputable companies.) Old ammunition may not fire with sufficient force to expet the projectile from the barrel.

READING THESE SAFETY RULES WILL SAVE YOUR LIFE OR THE LIFE OF SOMEONE ELSE

Get instructions from a competent firearms instructor before using this or any firearm. Learn from a prolessional how to handle, load, unique, operate, fire and care for your gun.

NEVER PLAY with your firearm. It is not a toy and can be a very dangerous weapon that can cause serious personal injury or death.

Always keep the gun pointed in a safe direction. Treat every gun as if it is leaded, all the time. NEVER point any firearm (leaded or unleaded) at any person or anything you do not intend to shoot. Always keep your gun unleaded until ready to use and make sure that it is unleaded before cleaning.

Keep your finger OFF the trigger until you are actually aiming at the target and ready to shoot. Learn to rest your finger outside of the trigger guard.

Never rely on a gun's "safety" to protect you from unsafe gun handling. A safety is only a mechanical device, not a substitute for common sense and gun safety procedures.

Never leave a gun unamended or where it could fall and tire.

Store guess and ammunition separately beyond the reach of children. Make sure that they are properly secured so untrained individuals and children will be denied access to your gups and ammo.

READING THESE SAFETY RULES WILL SAVE YOUR LIFE OR THE LIFE OF SOMEONE ELSE

Test your gur is operation and sateties only at a shooting range while the lirearm is pointed in a safe direction.

Know your larget and what is beyond. Ask yourself what your bullet will hit lift misses the target or passes through the intended target. Remember, a fired projectic can be veri ever a mile (including a neecher) and is capable of going through wells.

Guns and alcohol or drugs do not mix. Don't take any alcoholic bevarages and/or drugs belore or during shooting activities.

Never pull a gun toward you by the muzzla. Don't climb a tree, cross a ditch or tence with a loaded gun.

Always empty guns before entering a floure, car, truck, boat, RV, camp or any building.

When receiving a gun, always option the action and phack to make sure the chamber a unleaded

NEVER accopt anyone's word that a gum is "unloaded" or "empty". You should immediately open the action and check to make sure it is unloaded.

Be careful with <u>ALL</u> ammunition. Even "blank" cartridges are deadly at close range due to the muzzle blast. Make sure your ammunition is in new and in good clean condition. Do NOT oil or grease ammo as this may demage the cartridge primer. Do NOT tempor with or alter the standard factory ammunition.

Keep threatns unloaded when not actually in use. Load the gun only when an the range propering to fire and unload it before leaving the range.

Never put your hand over the muzzle of a gun.

ALWAYS WE'AR protective shooting glasses and hearing protection when using firearms.

Specietors should be at least 10 feet bahlod and away from the shooter while the shooter is loading, shooting and unloading. Speciators should wear protection for hearing and sight loss and they should avoid distracting those shooting their firearms.

Never thap your gun. If you do drop it, unload it and check it for proper tunction before using it again.

Do NOT after or modify your gars. Don't try to change your gun's trigger pull, because it may affect seer engagement and thereby cause accidental firing.

Do NOT remove any internal salety or safety device on the tirearm. Safety mechanisms are designed to protect you from injury or death.

Do maintain and keep your gun clean. Keep in a dry place away from other metals and water. If your gun shows sign of corresion or improper operation, have it serviced by a compatent gunsmith.

READING THESE SAFETY RULES WILL SAVE

Keep the mustile pointed in a safe direction when loading and unloading your gun. Never point the mustile at anyone.

Never shoot at hard hat surfaces of water. Dullets ricochel.

If a qualitalis to the warm the trigger is pulled, keep it pointed down range at the target for 60 seconds. Sometimes slow primer ignition will cause a "hang file" and the cartridge will go of after a short pause. If it still fails to tire, keep muzzle pointed in each piroction and avoid exposure to the breach, so you attempt to unload your thearm.

Never let water, show, mud or other material enter the barrel. Always be sure the barrel is free of any obstruction.

Since many ammunition identifications sound aimiler, be sure that you use only the correct ammunition for your gus. Do NOT use the wrong size or wrong strength ammunition in your firearm.

Repeated and prolonged exposure to guntre may cause toxic levels of lead in your body. High levels of lead in the blood may result cancer, impotency, birth defects and other senious physical rigury. When shooting indoors, make autablere is proper fresh sur ventilation.

Teach on lidren: 1. NOT to touch guins, bullets, cartridges, shells, flares or any explosive device and 2. If they discovery such a dangerous item or weapon, they must immediately report its location to their parants, ephop teacher or police.

Hemember a linearm has the capability of taking your life or the life of someone else. Be careful with your firearm -- an accident is almost always the result of not following basic safety rules.

HOME SAFETY IS PROBABLY YOUR BIGGEST CONCERN. We suggest a gun lock such as Master Gun Locks. They work on most treams and are svalishle in gun shops and sporting goods departments. For more information write: Master Gun Locks; Master Lock Company, P.O. Box 10867, Milwaukee, WI 53218. You have invested this much in your new treams, now invest a little more in your family's safety.

USED FIREARMS - If you got your European American Armory firearm as a used gun, BEFORE USING IT you should unload it and check all its functions to be sure it works correctly. Firearms are comptimes altered to work incorrectly, or parts may be removed, lost or replaced with incorrect parts. First, unload it and check it yourself and their take it to a good gunsmith who knows European American Armory firearms, and have him examine it.

WHITE US concerning any items or circumstances which you don't understand and which might relate to your safety and the operation of your firearm.

WARNING

BEFORE LOADING or firing a shotgun, examine the core and the firing charaber to be contain they are clean and tree of any obstruction. Even a heavy coat of oil grease, show or water may result in damage to the firearm and injury to the shooter and/or persons near the firearm. A mistire or unusual sound upon tingg to a signal to besse tining and to examine the chamber and bore. If there is any obstruction, clear the obstruction and dean the bore and chamber betore tining.

FIRING WARNING

When shooting, full eye and ear protection is mandatory at all times. Shootins and speciators must wear chooting glasses and sound suppressor to prevent eye injury and hearing loss. Vision loss and hearing impairment can occur with only one moment of non-protection.

WARNING

Any bare distribution, even if it is only partly blocked, may cause the gun to blow up if it is fixed, or may cause damage to the gun such as a bulged barrel. To avoid injury or death to the shooter or bystanders, check the barrel before shooting or if a shot does not sound normal.

WARNING

Always keep the muzzle pointed in a safe direction! Never adampt to load or unique any firearm inside a vehicle, building or other confined space (except a properly constructed shooting range). Enclosed areas frequently offer no completely safe direction in which to point the firearm. If an accidental discharge occurs, mere is great risk of injury or property damage. Before loading, always clean all, greass and oil from the bore and chamber, and check to be cartain that no obstruction is in the barrel. Any foreign matter in the barrel could result in a bulged or burst parrel or other damage to the firearm and could cause senous injury to the shooter or to others.

WARNING

If there is any reason to suspect that a bullet or projectile is obstructing the barrel, immediately unload the finarm [See Unloading Instructions] and check the chamber and the bore. A bullet or wad may be lodged some distance down the barrel where it can not easily be seen. Check the bore by using a cleaning rod to pass through the barrel. If a blookage is in the bore, DO NOT ATTEMPT TO SHOOT IT OUT WITH ANOTHER CARTRIDGE, OR BLOW IT OUT WITH A BLANK CARTRIDGE OR A CARTRIDGE FROM WHICH THE BULLET HAS BEEN REMOVED, SUCH TECHNIQUE(S) CAN GENERATE EXCESSIVE PRESSURE, DAMAGE THE FIREARM AND CAUSE SERIOUS PERSONAL INJURY. If the blockage can be removed with a cleaning rod, clean any unbounced powder grains from the bore, chambers & mechanism balors resulting sheeting. If the blockage can not be dislodged by tapping it with a cleaning rod, take the firearm to a gunsmith.

WARNING (Mechanical Malfunctions)

STOP SHOOTING IMMEDIATELY AND UNLOAD YOUR FIREARM if your firearm develops; a mechanical malfunction; binding or stoppage; spliting powder/gas; a cartridge primer is punctured; a cartridge case is builded or ruplured; or the sound on firing does not sound quite right. So NOT try one more shot but unload your lirearm and take it and the ammunition to a qualified gunsarith or send it back to EAA for examination. Do not assume that the shotgun is empty merely because you checked the chamber. You must also check the bore for any fired shot or wad jammed inside the barral.

EXTERNAL CONTROL PARTIE:

Trigger Black Safety: Located on the receiver tang behind the top lever, skide button asyle. When the safety is in the forward position the shotgun will fire when the trigger is pulled! Do not disengage safety unless you are ready to fire the shotgun. (Safety Engaged - The safety is in the full aft position and the trigger is blocked from full travel; Safety Disengaged - The safety is in the full forward position and the trigger has full travel. MAKE





SURE YOU UNDERSTAND HOW THE SAFETY WORKS BEFORE YOU LOAD OR USE THE SHOTGUN)

Top Lover: Located on top of the receiver, push to right to break open barrel from receiver of shotgun.

Hammers: Located on right and left hand alde of sholgun receiver. Used to cock hammer aprings and hit firing pin assembly when trigger is pulled. Never cook hammers unless you are ready to fire shotours.

Triggers: Located in the trigger guard. It salety is disengaged and hammers are cocked and trigger is pulled to the rear the shotgun will discharge, if there is a live darktridge in the chamber. The front trigger is for the right hand hammer. The back trigger is for the left hand hammer.

Forend Located below barrels in front of receiver, locke barrel assembly into receiver, has latch in the center to unlock the Forend.











Directions For Assembly Of Shotgun:

1) Fig. 1: When you open the box of your new IZH43KH shotgun the barrel and Forend is separated from the main portion of the shotgun. To attach the barrel and Forend lirst remove the plastic bags covering the parts. Then remove the Forend from the barrel by pulling the letch in the middle of the Forend and tipping the letch in the middle of the Forend and tipping the letch. Check to make sure that the partel is the of foreign matter by looking down the barrel into blockage whatspever).



5) Fig 3: Engage the lower looking lug located on the lower parties of the berrel with the receiver. The half round cut out on the lower locking lug fits around the round bar in the forward lower portion of the dot in the receiver. With the barrel engaged into the receiver you should be able to swing the barrel up into the locked position and the top lever should move back to the center once the barrel is







locked into position. Note: The top lever may not move completely to the center on a new sholgun until the gun is broken in. The lever must move at least three quarters of the full travel distance.

- 4) Fig 4, With the barrel locked into the receiver and place the Forend on receiver, With an upward swing motion lock the Forend onto the pairel. Do not force the Forend into it's locked position on the barrel.
- 5) Warning... Never fire the gun unless the barrel is locked into position on the receiver and the Forend is locked into the receiver and barrel.
- E) Fig 5: Make sure the trigger block safety is engaged after completion of assembly. Safety fully to the rear.




To Load Shotgun:

- Fig 6: Make sure the hammers are in the down position (Down position is with the hammers forward).
- Make sure the shofgun is pointed in a sale direction at all times, the trigger block sately is engaged, and never allow lingers or objects to contact trigger.



Warning *** Do not load shotgun until you are ready to fire

- 3) Do not disengage the trigger block salety until you are ready to fire.
- 4) Make sure the ammo that you are using a the correct size and gauge. The benefits marked with the gauge and chamber size, barrels marked 3' will also use 2 3/4" or 5' shot shells. Barrels marked with 2 3/4" will not accept 3' shot shells.
- 5) Fig 8: Visually inspect the chambers and barrel for obstructions by breaking open the shotgun by pushing the top lever to the side and hipping the barrel down. The chamber and barrel should be tree of oil or grease or obstructions.



are flush with the extractor, then close the detten by swinging, the barrel up till

It locks into the receiver and the top lever moves to the center position. If the top lever does not move to the center break open the aption again and check to see if the shot shall is fully seared in the chamber. If the shell is fully seated then re-close the action, if the shot shell is not fully seated check the chamber for blockage and check the shell for determation and retry



closing the action ence more, if the shell is the correct type and the champer is not blacked and the shell is not deformed and the top lever does not move at least three quarters of the full travel distance to the center after closing then unload the gun follow unloading instructions) and have a competent gunsmith look at the gun or return the gun back to EAA Corp. for review. Note: The top lever may not move completely to the center on a new shotgun until the gun is broken in. The lever must move at least three quarters of the full travel distance.

There is no excuse for not being careful.....

WARNING

Never lead a cartridge into the chamber until you are ready to fire the shotgun...

To Fire Shotgun.

WARNING

On a lide in gaige — 4, in the state of the state of the distribution and the distribution of the state of th

a wrining was in the about the line has been culted and the trigger block safety all use the same and the the to low of all Make and the Gurdis pare each a same the find by long arms to the explorer safety of May 60 80 50 50 50 dds d) Follow the instruction below for unloading the shortour

If any integration of the confidence of some integration of the previous cannot be free and the confidence of the previous cannot be free and the confidence of the confidence

PLEASE READ AND UNDERSTAND ALL WARNINGS IN THIS MANUAL BEFORE FIRING SHOTGUN MAKE SURE YOU KNOW WHAT YOU ARE SHOOTING AT

There is no excuse for not being careful...

- 1 Make sure he for a purior in a sale freetran and har you are wearing ear and eye protection and keep fingers musy from triggers.
- 2) Engage trigger block safety a roll aiready engaged
- 3) Fig 11. With the trigger block salety engaged cock is harmers fully You must take great care during the harmer COCKING operation due to the fact that if your thumb were to slip off the harmer and for some reason the automatic internal harmer blocks tailed the shotgun could discharge



d) Disertage to sale visit the onlying providers an agent and entitle in sale to a sale of the short of the short of the independent of the bigger is pulled.

To Unload Shotgur

1) Make sure and set men in safe chapthor and the higger back as 't'y o englishes are a constant or safe to save the highest are an englishes and the control of the safe discount of the safe are safe are and the control of the safe discount of the safe are and the safe are and the safe are also safe discount of the safe are and the safe are a control of the safe are and the safe are a control of the safe are and the safe are a control of the safe

take great care during the hammer lowering operation due to the fact that if your shumb were to skip off the hammer and you are attit pulling the trigger the firearm could discharge see Fig 12.

There is no excuse for not being careful.....

- 2) After tampleting slap one completery il puer the top love is interight ablitic action breaks open.
- 3) Then fully open the action and remove the shells.
- Visually or ack to the partiels are free of histophone and then aloge the shotophone action.
- Engage the trigger block safety of or the shotgun action is project.

To Disassemble The Shotgun:

-) Make size the shot jumps inforced FOL OW UNLDADING INSTRUCTIONS), and cointed to a safe direction.
- Make sure the trigger block safety is engaged.

There is no excuse for not being careful...

- 3) But use the Fairest from the name by nelling the letter in the medic of the Forent and tempoling the Forend in a downward awing motion.
- 4) With he barrer and ledever supported with one hand gust the rop lever to he is. By and tip the barrer down until 4 disengages from the roceiver. Check the barrel for damage and blockage after removal.

MANUFACTURER'S WARNING

This firearm was manufactured to properly perform with the original parts as designed. It is your dirty to make rure any parts you buy are correctly installed and that neither explacements not displays are altered or changed. Your gun is a complex fool with many parts that their exception parts for sele and accurate operation. Putting a gun regether wrong or with modified parts can result in a camaged gun, in lury or death to you or others through malture ion. Always let a qualified gunsmith work on your gun in at least oneck any work not cardotmed by a gunsmith. Finearms safety is your universe concern. THE GUN OWNER MUST ACCEPT FULL RESPONS BILITY FOR THE CORRECT REASSEMBLY AND FUNCTIONING OF THE FIREARM AFTER ANY DISASSEMBLY OR REPLACEMENT OF PARTS.

Cleaning And Maintenance Of Shotgun:

- A) Follow a coadulas for a ibasing siratgun as described previncesy.
- Followin recedizes for disassambly or shorgun as described previously.
- C) Materials referred to disarr this short in one is proming the collabor bore paidness break bare orash, previous solvent in smoot soft brush and good quality gunipil.

WARNING FACTOL BATH OF DOUBLE'S BY KNOWN TO THE SIZE OF A TOTAL TO SUSA AND A TOTAL PARTY AND AND AND THE TAX BY AND AND THE AND AND THE AND AND THE PROPERTY OF AND THE AND AND THE A

There is no excuse for not being careful.

- D) Since executable will powder some some the Pierra Constitution of the Pierra Market will also be set to the Pierra Market with the Pierra Market M
- El Antitude for the formula of the formula of the same of the same
- F) A electric sital esistion be willed driver will a tendral transpersion to the sample sample to the old creating a gum that in time will cause mistires.
- 6) A fine sing some thing in the classing freinner: twoess come with in the two ear dam in the current single statute of wipe iway all excess solvent and then jubicose with oil.
- His All is an increase after the addition effects parts should be will all the time of a given in the All the discontinuous Biological Security and the time of time of time of the time of time of time of the time of time o

DANGER AMMUNITION WARNING

I readmentary for damaged and selected we characteristic death or gene altonoof exposes we prosedure or incontrolled release of ggs within the final or Such acres a consider as the adjusce by the or enterpolarity powder averages to by reference incomes or impropedy income and resembled carriedge components. Ever the stronger finds in care be higher up as a result or excessive pressure. It is exceeded, do get the final in use a controlly which it is easy to get a death of the stronger finds of the stro

AMMUNITION (CARTRIDGES) NOTICE

As specifically decising as to rait in, to any termage injury of doubtill coming onnection with or as the rase of the use of Europea And car Andry of standard remains actuated tending object or observed as internal to asserbe indiges or certificate or earliest acting certification when the firearm was originally chambered.

LUBRICATION WARNING

Fire years guinary groups all yother hade affects periodly an outer a course may east in der eige to the shokular and office your and outer the second respectively. In our party out a course with a course of the outer of the course of the outer of the course of the outer of the course of the cou

LIMITED REPAIR WARRANTY

Europes A en a Arin v C. 2 CH43KH S. gors alloward et ich ins, at all as en in the real finitiate guid size a little ia. I y die, in this is A is parts and round agric order a out of more red S. to the parts and round agric order a out of more red S. to the entire et bring are all its in out a end of a law from event or pure assistant and a service at the end Stock and insertious purchase date.

Figure us in of it assets recessor/or at war any accentaction of a spinorastion is and from our repair addition gives the lia was, damage our set by fallone in entire righted in a decrease of fallone in a contact of the set of the

An Viring and Are a loss to an injuries injuried was written a more arrival. By a first a contract of the Area of

purchase freight prapaid to

European American Armory Corp. 3955 North L. S. Highway One Coppe. Florida 32927

WARNING

After ig or modify ig parts our or internal saletine is canger in and we would the warrunty. The chalged was marked internal or properly with the original state of the saleting properly with the market filter reasons a pre-internal of correct vistal of hermonic state according to the according to the saleting of the

13

PARTS LIST

1 Barrels

2 Stock inving revival page

3. Extractor plb 4. Woodsciew Ctopring &

& Strew

Swing talvel privat 2

& Swing selver

9. Strew

10. Bartal swing swivel base

15, Front Stead 12. Forend 13, Screw first Id. Spring

15. Forund calch housing

18. Foreset valor

17. Pivol. 18 Screw

19 Screw 20. Scrow 21 Screw

22 Washer 23 Bullplate 24, Forend hings

Zā, Buttelack 25, Salety apring

27 Pecewar 28 Cam 20. Carr pivor

30, Sear prost 31, Left, seen 22 Left Temmer

33 Gag

34. Gary screwy 36. Ентроског авт

36. Let firing spring assembly 97 Right filling spring assumbly 36 Seal apring ag, Siefety of

40, Screw

41 Looking lever 42 Right (summer)

43 Right modes #4 Rhplot seesu

45 STIEW 46. Bolery slids

47 Looking bu 48 Borew

49. Looking bur spring

St. Carnelle 51. Hacever bridge

58 Looking par rocker

53 Bail 64 Left zoeker 55 5alety 56 5erow 57 Bushing 58. Screw

59. Left side page 65. Fight aids pale

61 Screw

52 Trigger guard base 53 Stream

84. Trigger guard 65. Trigger guard screw

GE Left moger 67 Trigger spiling


58 Fight Ingger 59. Pin

76 Bushing

21, Blocking frame 72. Bloowing frame level

73 Lever suring 74 Safety bar

IZH43KH Exploded View

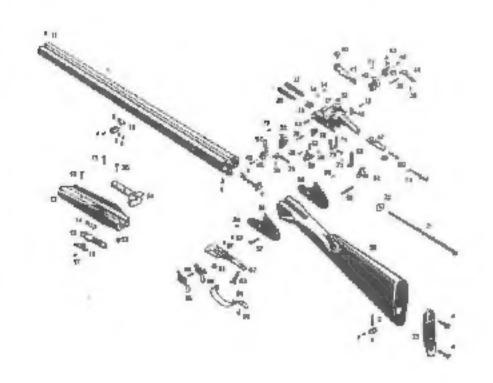

YOUR OWNERS' MANUAL

Always keep this manual with your lirearm. Make sure you understand all the warnings, operation instructions and safety procedures. When you lend, give or sell the firearm, be sure this manual goas with it. You can get a copy of this manual from European American American American American.

ALL PARTS ORDERS ARE SUBJECT TO A \$10.00 CHARGE FOR SHIPPING AND HANDLING. Please state Model, Callbor, Senai Number, and Finish Color when ordering. For prots, information and service contact: European American Armory Corp., 3855 North U.S. Highway Orie, Cocoa, Florida 32927 Phone: (407) 639-4842.

Additional information on screw choke tubes:

- A) Before working with screw chose tubes make sure the gon is completely undexted.
- 8) Only tighten or leason choke tubes with fall key wronch supplied with chalgen. Note: wrench (and extra choke tube or tubes <u>it supplied</u>) are under the cardinard in front of the chalgen receiver in the box.
- G) Never shoot the sholgun with a periody installed choke tube.
- D) For size and or slugs use IC or Cylinder challe tubes. If your gun has choke tubes that protrude out the barrel and are checkward on the outside area that protrudes in front of the barrel, these are steel shot droke tubes and the IC or Cylinder note does not apply for the steel shot. The IC or Cylinder choke tubes are the only tubes that can be used with slugs.
- F) Conectly Installed choke tubes. Lead shot choke tubes should lit flush or slightly below the muzzle end of the barral. Steel shot choke will protrude out from the barral about 3/4" or sq and the maxing lip will be flush with barral end.
- Ci) Before using the sholgun make sure that the choke tubes are installed correctly. 1) make sure the gun is unloaded 2) took into the barrel from the muzzle end and you should see a ring at the junction of the barrel and the tube. The jing that you will see is caused by the barrel not the tube. If if you see the tube and not the barrel ring, then the tube is either installed too tight or demaged. What you want to see at the junction of the burrel and tube is the tube edge below the barrel. You may slee user your linger to feel that the bertal is above the tube at the junction. Cirreld that your finger does not excome stuck in the tube. Check your phoke tube after each use or every 100 rounds.
- H) Keep choke tubes lubricated and installed. Never fire the gun without a choke tube installed. Hendle phoke tubes carefully since the leading edge is very thin.

Optional Screw in Chokes Tube Symbols/Markings:

The end of the chokes are marked with stasties in determine choke.

I/III - Eidra Full

/ - Full

- Improved Modified

/// Modified

1/// - Improved Cylinder

Gi - Cylinder

Make sure that you trilly install the choke fude before you fee the shotgue. The chokes are right hand thread. Make sure that you do not cross thread the chokes end after use remove the choke tube and clean the choke tube threads and location in the barret where the choke tube thread into.

If you would like to buy extra choke tubes (skeet, trap. extra full, etc.) cell; Colorial @ 1-800-949-8088

AWARNING

Children are structed to end can operate freems that can cause severe injuries or death.

Prevent child access by always keeping guns locked away and unloaded when not in use. If you keep a loaded fream where a child bottens and improperty uses it, you may be fined or sent to presen.

ADVERTENCIA

A los ninos los atroen las armoside de fuego y los pueden hacer hindionar. Ellos pueden causarses legiones galves y la muede

Evite que los nintos tengon acceso quás emais de fuego guardendolas signipas con llave y descargades cuando no les este utilizando. Bi ustad tiene un atmo de fuego cargado en un jugar en que un nono tiene acceso a elle y la use indebidamente. Le pueden der una muita a enviario a la carcol.

Importer:

European American Arthory Corp. 3855 North US, Hwy, 1 Cocos, FL 32926

Manufacturer:

Izhevsky Mekhanichesky Zavod 8. Promyshlennaya Str. Izhevsk, Russia 426063